


STAINLESS STEEL STONE ANCHORS EMBEDDED CHANNEL STRUT

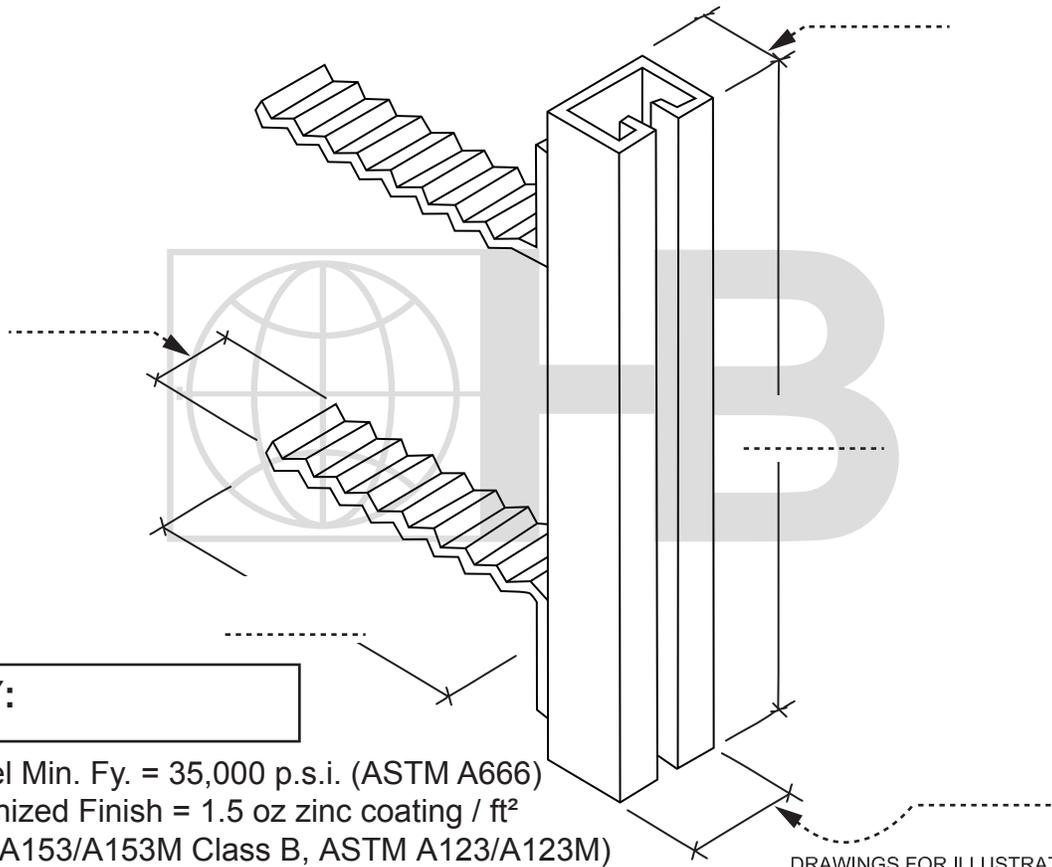

QUANTITY:

ST/ST Channel Min. Fy. = 35,000 p.s.i. (ASTM A666)
 Hot Dip Galvanized Finish = 1.5 oz zinc coating / ft²
 (ASTM A153/A153M Class B, ASTM A123/A123M)

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

<p>FINISH:</p> <p><input type="checkbox"/> TYPE 304 Stainless Steel</p> <p><input type="checkbox"/> TYPE 316 Stainless Steel</p> <p><input type="checkbox"/> Hot Dip Galvanized</p>	<p>Contact an H&B technical representative for anchor options and additional product information.</p> <p>Furnished in Type 304 ST/ST, Type 316 ST/ST, or Hot Dip Galvanized.</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<p>PROJECT NAME:</p> <p>LOCATION:</p> <p>NOTES:</p>	<p>CONTACT INFO</p> <p>Name :</p> <p>Company:</p> <p>Phone: FAX:</p> <p>Email:</p>
--------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.