
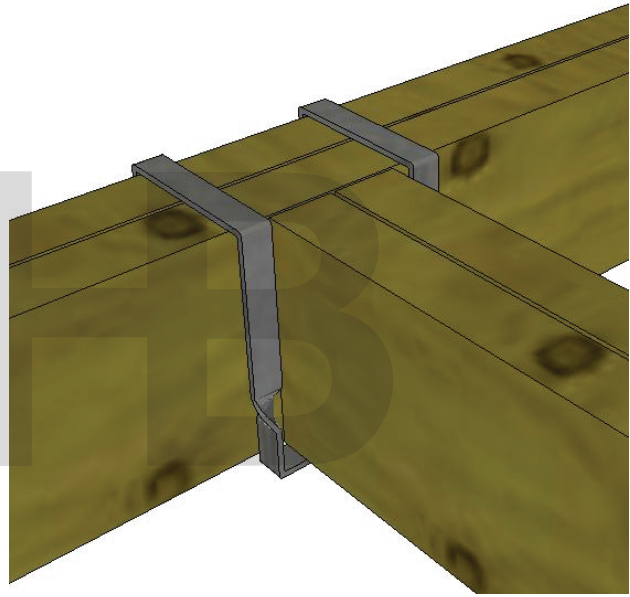


# BRIDLE HANGER

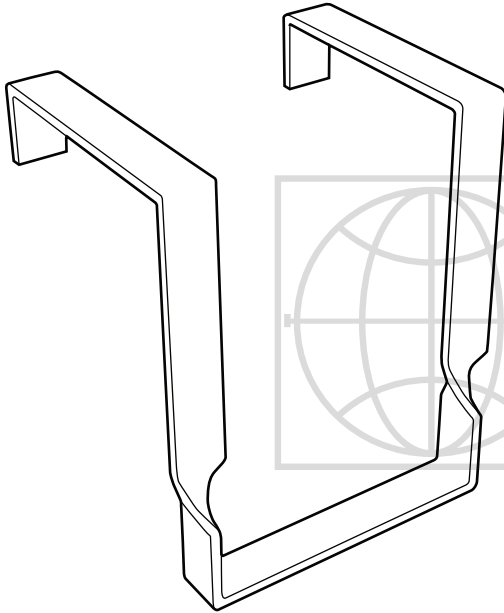

**QUANTITY:**

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

An iron flat bar used to support timber where no sufficient bearing can be held.

**MATERIAL CONFORMANCE:**

Plain Steel: ASTM A36/A36M  
Hot Dip Galvanized:  
ASTM A153/A153M B2  
Stainless Steel (Type 304): ASTM A240/240M  
High Strength-Low Alloy:  
ASTM A572/572M, Grade 50

**FINISHES:**

☐ Plain Steel    ☐ Hot Dip Galvanized    ☐ Stainless Steel  
(Type 304)

**Thickness:** ☐ 1/4"    ☐ 5/16"    ☐ 3/8"    ☐ OTHER \_\_\_\_\_

**Height:**    ☐ 2"    ☐ 3"    ☐ OTHER \_\_\_\_\_

**Depth:**    ☐ 2"    ☐ 3"    ☐ OTHER \_\_\_\_\_

**Length:**    ☐ 10'-0"    ☐ OTHER \_\_\_\_\_

**PROJECT NAME:**

**LOCATION:**

**NOTES:**

**CONTACT INFO**

**Name :**

**Company:**

**Phone:**

**FAX:**

**Email:**

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.